



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	25216-820	Total Pages	17
First Inventor or Application Identifier		Sean O'Hara et al.	
Title	METHOD FOR SOFTWARE CONTROL USING A USER-INTERACTIVE COMPUTER ICON		
Express Mail Label No.	EL322092421US		

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patent
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 12]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed.-Sponsored R&D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Detailed Description of the Drawings
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (37CFR 1.152) [Total Sheets 4]
4. ☐ Oath or Declaration [Total Pages 1]
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

*NOTE FOR ITEMS 1 & 13, IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28)

5. ☐ Microfiche Computer Program (Appendix)
6. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS) PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

Prior application information: Examiner _____ Group/Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

021971			
<input checked="" type="checkbox"/> Customer Number or Bar Code Label		(Insert Customer No. or Attach bar code label here)	
<input type="checkbox"/> Correspondence address below			
NAME			
ADDRESS			
CITY	STATE	ZIP CODE	
COUNTRY	TELEPHONE	FAX	

Name (Print/Type)	John O. Gimore	Registration No. (Attorney/Agent)	46,375
Signature		Date	May 18, 2000

Burden Hour Statement: This form is estimated to take 100 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

**METHOD FOR SOFTWARE CONTROL USING A USER-
INTERACTIVE COMPUTER ICON**

Inventors: Sean O'Hara, Gary Responde, Lauren Utigard, Joe Tate

5 Cross-Reference to Related Application

This application claims priority to U.S. provisional application Serial No. 60/____, (Attorney Docket No. 25216-802) filed May 16, 2000 entitled "METHOD FOR SOFTWARE CONTROL USING A USER-INTERACTIVE COMPUTER ICON" which is fully incorporated herein by reference.

10 Field of the Invention:

This invention relates to handheld computers in general and to iconography for hand-held computers in particular.

15 Description of Related Art:

Engineering hand-held computers poses special problems in comparison to desk-top or lap-top computer design. One problem relates to combining device functionality and convenience with an inherently small display size. In contrast to desk top or lap top computers having displays comparable in size with a standard sheet of paper, a hand-held computer inherently has a display about the size of the palm of a human hand. Since the display space is limited to be considerably smaller than that of other computers, the amount of surface area allocated to graphical features providing functional control is a design consideration.

25 Typically, a hand-held computer user selects a menu icon on a display screen with a stylus and opens a menu of control options that occupies an area of the display screen. Then, the user must drag the stylus to a subsequent selection within the menu display or otherwise proceed through an array of displayed choices by manipulating the stylus or keys or buttons on the computer's face. Often, the user must pass through several levels of choices and perform attendant manipulations to arrive at the desired functionality. This is needlessly complicated and frustrating to the user. Related methods using a

30

dedicated writing, or "graffiti," area of a touch sensitive screen are an improvement. However, by having a dedicated area for general writing input, an association of the writing input to particular aspects of software is not immediate.

5

Summary of the Invention

This invention is a method for software control using a user-interactive display screen feature. According to the method, a graphical feature having a surface area is displayed on a touch-sensitive screen. The touch-sensitive screen is coupled to at least one processor and the graphical feature is generated by an operating system and uniquely associated with a particular software program by the operating system. To control software executing on the processor, a user-supplied writing on the surface area is received and the software is controlled responsive to the writing. In alternate embodiments, the method further controls data stored in a memory device responsive to the writing or further controls transmission of data from a radiation emitter, which may be coupled to voice and data networks.

In one embodiment, the writing is a sequence of impulses applied to the touch-sensitive screen. In other embodiments, the writing comprises at least one character of an alphabet or simple shapes such as circles or polygons. Software commencement and cessation, logical decisions, and graphical presentation are non-limiting examples of control that may be accomplished by the method.

Brief Description of the Drawings

- 5 Figure 1 illustrates a hand-held computer.
- Figure 2 illustrates one embodiment of a display.
- Figure 3 shows a flow chart of one embodiment of the method.
- Figures 4A-4D illustrate an embodiment of a user-interactive feature and exemplary writings.

05/17/2010 05:18:00

Detailed Description

FIG. 1 illustrates a hand-held computer 100 for use with an embodiment of this invention. In FIG. 1, housing 110, touch-sensitive screen 120, radiation emitter 130 and network 135 are shown. At least one processor and storage memory device are within the housing and not shown. Examples of handheld computers include PALM III™, PALM V™ and PALM VII™ organizers, manufactured by PALM, Inc. Other examples include devices operating a Windows CE™ or pocket windows™ operating system. Still further, handheld computers may include cell-phones and other network-enabled devices.

The characteristics of suitable touch-sensitive screens, radiation emitters, processors and storage memory devices are well known in the art. In different embodiments, the radiation emitter may be an optical radiation emitter, or a radio frequency radiation emitter, or a microwave radiation emitter. In a preferred embodiment, the storage memory device is a non-volatile memory device. A volatile memory device may also be provided.

Network 135 may be digital or analog, or a voice network such as a cellular phone network or a data network such as the Internet. Alternate networks include local area and wide area networks. From FIG. 1, a user may interact with hand-held computer 100 through touch-sensitive screen 120. Radiation emitter 130 couples the computer to network 135. Embodiments of the computer may also include a radiation receiver (not shown) for two-way communication with the network. Suitable radiation receivers are also well known.

FIG. 2 illustrates one embodiment of a display for handheld computer 100. In FIG. 2, touch-sensitive screen 120, writing area 210, user-interactive feature 220 and feature surface area 225 are shown. For the embodiment in FIG. 2, the location of the writing area is fixed on the screen and is a general input area, not associated with particular software by the computer operating system. The writing area may be a Graffiti™ input feature, such as used by handheld computers using a PALM operating system.

09574720, 0513030

In an embodiment, the user-interactive feature 220 is programmatically controlled to appear at any particular location of the screen by an operating system. The user-interactive feature may also be associated with a particular software program by the operating system. An example of a user-interactive feature is an icon. Other examples are menus and check fields. The user-interactive feature may be state-selecting, so as to select, for example, between unactuated and actuated states.

FIG. 3 shows a flow chart of one embodiment of the invention. In FIG. 3, user-inputs 345 control software including software application program 350. The software application may be in two-way communication with hardware units such as touch-sensitive screen 370, memory 385 and radiation transmitter 390. The transmitter is in communication with network 395. As is obvious to one skilled in the art, a computer system may consist of other hardware and software in addition to, or instead of, that shown in FIG. 3 without departing from the invention.

In FIG. 3, a system starts at block 310 by displaying a user-interface. The user-interface includes a graphical user-interactive feature such as an icon on screen 370 (see block 330). According to the invention, the graphical user-interactive feature is generated by the operating system and uniquely associated with a particular software application program 350 by the operating system.

User input 345 from the interactive feature may open or reconfigure the software application associated with the user-interactive feature at block 340. User input may also control logical decisions within the software application at block 360 or cause cessation of the software application at block 399.

Interaction between the user and the graphical feature or icon displayed on the touch-sensitive screen includes writing on a surface area of the feature. Writing includes a sequence of impulses, or taps, applied to an area that is less than or equal to the surface area of the graphical feature. According to the invention, writing also includes characters of an alphabet or numbers or simple shapes such as circles or polygons. Combinations of all of the foregoing types of writing are also possible.

0574720.051300

In an embodiment, the writing is momentarily apparent on the display, before the user input is acted on by handheld computer 100. Preferably, the writing on the icon causes an action that is different than activating the icon. For example, the icon may be activated through a single-tap, applied to a region of screen 370 where the icon is being displayed. In contrast, the writing is a gesture applied on the region of the screen 370 that is not a single-tap.

Logical decisions determined at least in part by input from the graphical user-interactive feature may determine input/output communication with hardware devices such as touch-sensitive screen 370, memory 380 and radiation emitter 390. In this embodiment, the input/output communication with the screen, including the writing on the user-interactive feature may present additional graphics to the user, including graphics indicating additional user-selectable software options. The input/output communication with the memory controls data stored in the memory, which includes deleting or altering data in memory. The input/output communication with the radiation emitter controls transmission of information to network 395. Alternate embodiments may include a radiation detector for two-way communication with the network.

Writing on the user-interactive feature may alter data stored in memory. A preferred memory 380 is non-volatile, but may also be volatile. Alternate embodiments include interaction between a processor and a random access memory (RAM) and read only memory (ROM). A preferred type of memory is operated by control of electric fields within a semiconductor. However, alternate embodiments include magnetic or optical memory devices. Radiation emitter 390 may be an optical radiation emitter or a radio frequency radiation emitter or a microwave frequency radiation emitter. Network 395 may be a digital or analog network for voice or data and may be a local area or a wide area network.

FIG. 4A-4D further illustrate an embodiment of a user-interactive feature and exemplary writings. In FIG 4A-4D, user-interactive feature surface area 410, stylus tap marks 420 and other writings 430 are shown. In FIG 4A, a single stylus tap commences or launches the software application associated with the user-interactive feature and a double tap presents other options for the

application on display 370 (see FIG. 3). In FIG. 4B, writing an “x” over the user-interactive feature deletes the application from memory 380 (see FIG. 3). In FIG. 4C, writing a “b” over the user-interactive feature transmits, or beams, the application from radiation emitter 390. In FIG. 4D, writing an “o” over the user-interactive feature presents other options for the application on display 370.

The foregoing description of various embodiments of the invention has been presented for purposes of illustration and description. It is not intended to limit the invention to the precise forms disclosed. Many modifications and equivalent arrangements will be apparent.

CLAIMS

What is claimed is:

- 1 1. A method for software control, comprising:
2 displaying a graphical feature on a surface area of a touch-
3 sensitive screen, the touch-sensitive screen being coupled to at least one
4 processor and the graphical feature being generated by an operating system and
5 associated with a particular software program by the operating system;
6 receiving a writing on the surface area provided by a user; and
7 controlling programming on the processor in response to the
8 writing.
- 1 2. The method of claim 1, wherein displaying a graphical feature
2 includes defining a boundary of the surface area by a portion of the screen
3 displaying the graphical feature.
- 1 3. The method of claim 1, wherein controlling software includes
2 controlling at least one logical decision of the software.
- 1 4. The method of claim 1, wherein the writing is a sequence of impulses
2 applied to the touch sensitive screen.
- 1 5. The method of claim 4, wherein the sequence of impulses is applied
2 to an area that is smaller than the surface area of the graphical feature.
- 1 6. The method of claim 1, wherein the writing comprises at least one
2 character of an alphabet.
- 1 7. The method of claim 1, wherein the writing comprises a substantially
2 circular writing

1 8. The method of claim 1, wherein the writing comprises a substantially
2 polygonal writing.

1 9. The method of claim 3, wherein the at least one logical decision of
2 the software includes a logical decision determining graphics presented to the
3 user on the display screen.

1 10. The method of claim 9, wherein the graphics presented to the user
2 on the display screen indicate user-selectable software options.

1 11. The method of claim 1, wherein controlling the software includes
2 determining the commencement and cessation of execution the software on the
3 processor.

1 12. A method for software control and communication using a user-
2 interactive display screen feature, comprising:
3 displaying a graphical feature on a surface area of a touch-
4 sensitive screen, the touch-sensitive screen being coupled to at least one
5 processor and the graphical feature being generated by an operating system and
6 associated with a particular software program by the operating system;
7 receiving a writing on the surface area provided by a user;
8 controlling programming on the processor in response to the
9 writing; and
10 transmitting data by generating a signal emanating from the
11 radiation emitter.

1 13. The method of claim 12, wherein the radiation emitter is an optical
2 radiation emitter.

1 14. The method of claim 12, wherein the radiation emitter is a radio
2 frequency radiation emitter.

1 15. The method of claim 12, wherein the radiation emitter is an
2 microwave radiation emitter.

1 16. The method of claim 14, wherein the radiation emitter is coupled to
2 a computer network.

1 17. The method of claim 14, wherein the radiation emitter is coupled to
2 a telephone network.

1 18. The method of claim 15, wherein the radiation emitter is coupled to
2 a computer network.

1 19. The method of claim 15, wherein the radiation emitter is coupled to
2 a telephone network.

1 20. A method for software control and memory storage using a user-
2 interactive display screen feature, comprising:
3 displaying a graphical feature on a surface area of a touch-
4 sensitive screen, the touch-sensitive screen being coupled to at least one
5 processor and the graphical feature being generated by an operating system and
6 associated with a particular software program by the operating system;
7 receiving a writing on the surface area provided by a user;
8 controlling programming on the processor in response to the
9 writing; and
10 controlling data stored in the memory responsive to a writing on
11 the surface area provided by a user.

1 21. The method of claim 20, wherein controlling the data stored in the
2 memory includes altering data in the memory.

1 22. The method of claim 21, wherein altering data in the memory
2 includes deleting data representing software applications from the memory.

1 23. The method of claim 20, wherein the storage memory is a non-
2 volatile storage memory.

1 24. The method of claim 20, wherein the storage memory is a random
2 access memory.

1 25. The method of claim 20, wherein the storage memory is read by a
2 magnetic memory reader.

1 26. The method of claim 20, wherein the storage memory is read by an
2 optical memory reader.

1 27. The method of claim 20, wherein the storage memory is read by
2 controlling electric fields within a semiconductor.

1 28. A handheld computer configured to receive a writing on a selectable
2 user-interactive feature to configure a processor to perform a function different
3 than another function performed by selecting the user-interactive feature.

1 29. A handheld computer, comprising:
2 means for displaying a graphical feature on a surface area of a
3 touch-sensitive screen, the touch-sensitive screen being coupled to at least one
4 processor and the graphical feature being generated by an operating system and
5 associated with a particular software program by the operating system;
6 means for receiving a writing on the surface area provided by a
7 user; and
8 means for controlling programming on the processor in response
9 to the writing.

ABSTRACT

A method for software control using a user-interactive display screen feature is disclosed that reduces stylus or other manipulations necessary to invoke software functionality from the display screen. According to the method, a graphical feature having a surface area is displayed on a touch-sensitive screen. The touch-sensitive screen is coupled to at least one processor and the graphical feature is generated by an operating system and uniquely associated with a particular software program by the operating system. To control software executing on the processor, a user-supplied writing on the surface area is received and the software is controlled responsive to the writing. In alternate embodiments, the method further controls data stored in a memory device responsive to the writing or further controls transmission of data from a radiation emitter, which may be coupled to voice and data networks.

09574720.051800

100

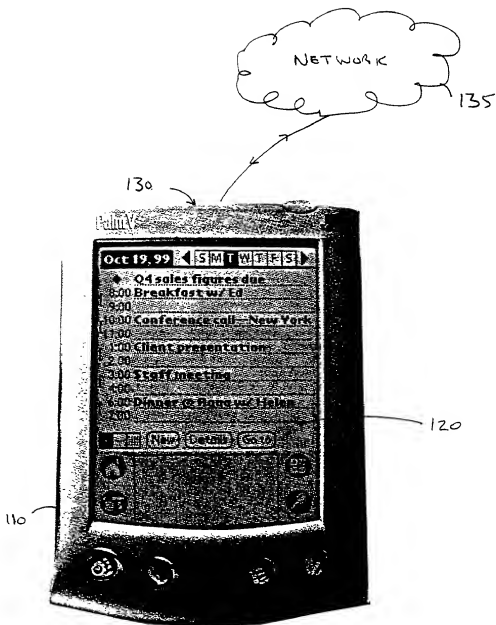


FIG. 1

09574720.051800

120

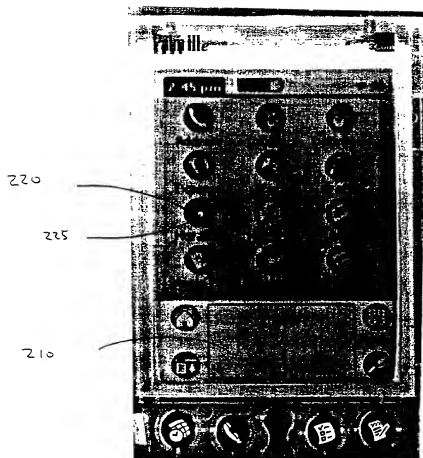


FIG 2

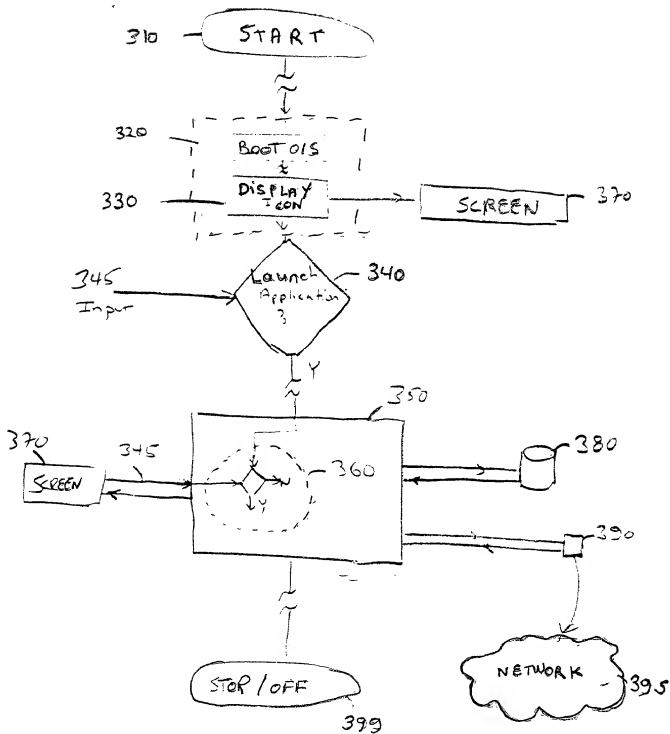


FIG. 3

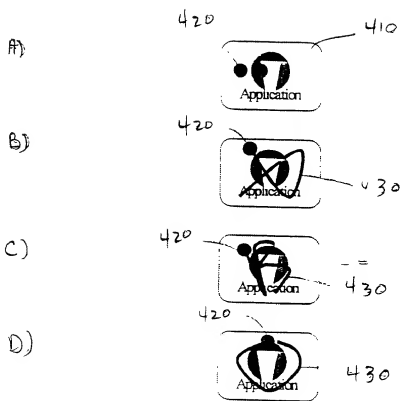


FIG 4